

Gas-Liquid Heat Exchanger for ventilation systems

Version The Colasit gas-water heat exchanger in plastic for corrosive exhaust air and gases has a modular design and is used for energy recovery. The size and construction are designed according to the requirements for melt stream and performance as well as the use for clean and polluted exhaust air and gases. All components are made of thermoplastic materials.

Colasit heat exchangers are cleaned by means of pressurized water or, if necessary, by use of chemical detergents. The high degree of corrosion resistance allows chemical cleaning of the Colasit heat exchanger.

Material housing: PP, PPs, PPs-el, PE, PVDF
Material heat exchanger: PE, PVDF
Operating temperature gas side: until +140 °C

Application A contribution to the environment and sustainability.


Heat recovery processes from aggressive waste air
E.g. in electro- plating in the chemical industry, in the electronics industry

Cooling aggressive waste gases from scrubbers and heating up subsequently
E.g. in drying technology, during chemical metalworking, waste incineration, sewage sludge incineration

Condensation of vapours
E.g. in the chemical, pharmaceutical, drying technology industries

Construction Pipe package made of PE, Collector lying in the gas flow. Tightly welded casing with integrated condensate collector and flange connection

Accessories Cleaning system
Droplet separator

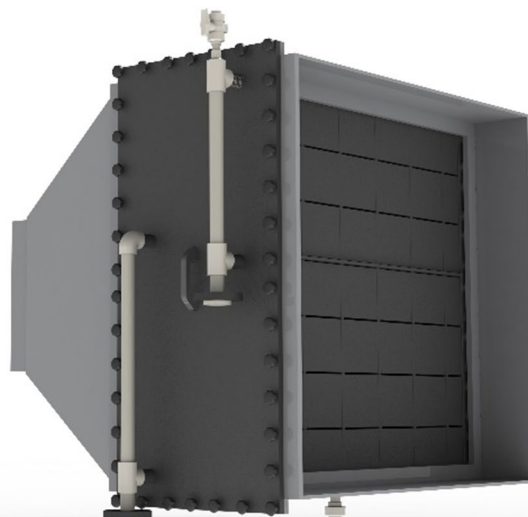

Edition 2024 • Subject to alteration • Copyright by COLASIT AG Spiez

COLASIT Asia Pte Ltd
Plastic construction • 38 Woodlands Industrial Park E1 #03-04 • Singapore 757700
Phone +65 6852 35 80/1 • info@colasit.com.sg
www.colasit.com.sg

Competence in plastics. Worldwide.

